


SPECIFICATIONS

Original RIPCORD Smoker™ with LiquiSmoke™

FOR INFLOW ANALYSIS OF SEWER LINES

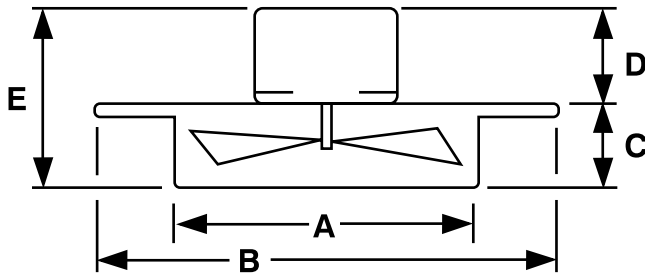

Physical Specifications (See illustration above)

Dimension	Smoker	Super Smoker
A	18.5"	23.5"
B	30"	30"
C	5"	5"
D	9.5"	12.5"
E	14.5"	17.5"
Weight	82 lbs.	114 lbs.

Engine Specifications

Feature	Smoker	Smoker	Smoker
Engine	Briggs & Stratton 5hp Quantum I/C	Honda 5hp Overhead Valve	Tecumseh 8hp Formula 8XL/C
RPM	3600	3600	3600
Gas Tank Capacity	1.5 qts	1.06 qts	3 qts

Performance Specifications

Static Pressure	Smoker	Super Smoker
0.001	6,211 CFM	12,987 CFM
1.000	5,632 CFM	12,101 CFM
3.00	4,130 CFM	8,761 CFM

Special Features of LiquiSmoke™:

- Has a virtually indefinite shelf life.
- Does not require a hazardous shipping label.
- Does not contain Zinc Chloride, a listed toxic compound in OSHA 1915.1000 - Air contaminants.
- Available in 1 gallon jugs, boxes of four 1 gallon jugs, 5 gallon pails, and 55 gallon drums.
- Pressure canister holds 2 gallons of LiquiSmoke™ - enough for a typical work day.
- Metering valve to precisely control smoke flow and density.
- High performance **SuperJet™** muffler. Continuous and constant smoke production. Nearly 100% burn - little to no wasted LiquiSmoke™ making it the most cost-effective smoke in the industry. See it work at our website.

HURCO

TECHNOLOGIES, INC.

P.O. Box 70 • Harrisburg, SD 57032

1-800-888-1436

Toll Free Fax #: 1-800-516-7337

www.hurcotech.com