
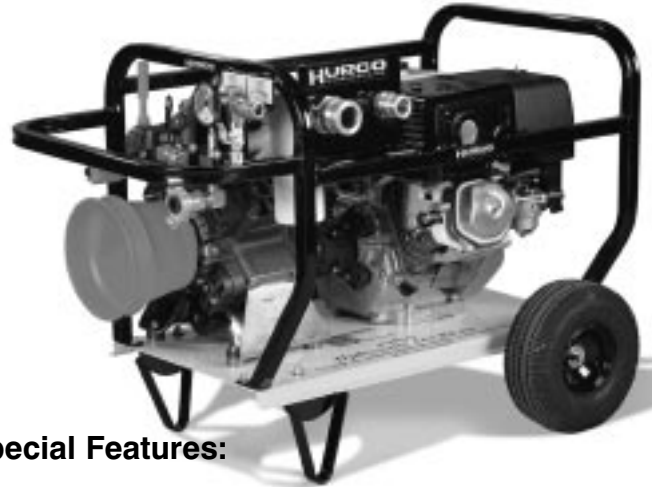


Hydrostatic Test Pump

FOR PRESSURE TESTING WATER MAINS

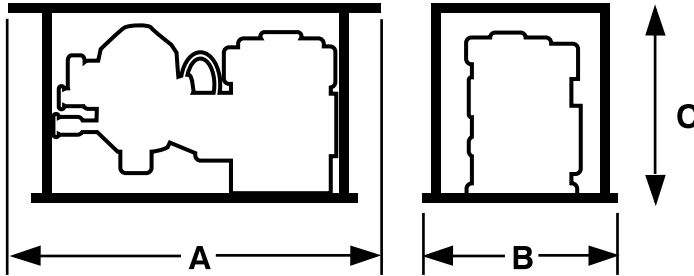

Physical Specifications (See illustration above)

Dimension	HTP10-500 & 500H	HTP23-700H
A	36"	37"
B	17"	22"
C	16"	31"
Weight	130 LBS.	210 LBS.

Engine Specifications

Feature	HTP10-500	HTP10-500H	HTP23-700H
Engine	Briggs & Stratton 5.5HP Vanguard	Honda GX 160 5.5HP	Honda GX 390 13HP
RPM	3600	3600	3600
Gas Tank Capacity	4.2 qt.	1.06 qt.	6.9 qt.

Performance Specifications

Description	HTP10-500 & 500H	HTP23-700H
GPM	9.5	27.9
PSI	580	725

Special Features:

- All pumps utilize Buna-N diaphragms.
- In-Line Strainer.
- Silicone Filled 600 PSI Test Gauge.
- Integral Control Unit for fail-safe operation.
- Accumulator Diaphragm removes pulsations.
- Enclosed Gear Reduction leaves no exposed moving parts.
- Welded Tubular Steel Frame with Steel Base.
- 10' of 1" suction hose for HTP10-500 and 500H.
10' of 1 1/2" suction hose for HTP23-700H.
- 12' of 1/2" pressure hose.
- One piece manifold system for inlet and outlet. (Reduces leak points and makes repairs easier.)
- Durable baked-on Powder Coat Finish.
- Freeze warning - Liquid Crystal Temperature Indicator.

Optional Equipment:

- Pressure washer kit with 40' of hose.
- Float Controlled Water Reservoir (for HTP10-500 & 500H only).



HURCO

TECHNOLOGIES, INC.

P.O. Box 70 • Harrisburg, SD 57032

1-800-888-1436

Toll Free Fax #: 1-800-516-7337

www.hurcotech.com